


2MP CMOS HD Array IR Network Solar Powered Camera

Model: PN120W-IRW



Features

- * Solar power powered security camera, 2.0MP(1920X1080)
- * With 4/6/8mm 2.0 Megapixel HD Lens
- * Built-in TF card, support up to 64GB.
- * Night Vision 0-20m
- * 4G connect, support mobile remote(IOS/Android)
- * Support P2P cloud,make easy remote view by internet and smart phone and CMS
- * Support motion detection

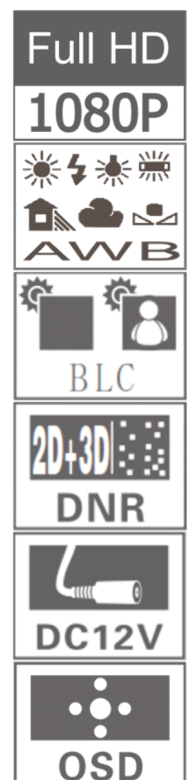

Specification:

General	
Model Number	PN120W-IRW
Image Sensor	1/2.9" 2.0MPHi3516EV300 CMOS
Resolution	2.0MP(1920x1080)
WDR	Support
SNR	≥50dB (AGC OFF)
Min. Illumination	Color: 0.1Lux@F1.2, B/W: 0.01Lux@F1.2
D/N mode	Auto IR-CUT switch, B/W, Color, Outer control
DNR	Support 2DNR, 3DNR
Camera	
Image Compression	H.265/H.264 video compression
Max Image Size	1920x1080 @25fps
Video Resolution	Main stream: 1920*1080, 1280*960, 1280*720, 720*576, 640*480 Sub stream: 640*480, 480*360, 352*288, 320*240, 176*144
Lens type	2.8/4/6/8/12mm 2.0 Megapixel HD Lens
IR Distance	0-20m(2pcs IR Led)
TD-SCDMA	Support 4G(B38/B39/B40/B41), 3G(B34/B39), 2G(900/1800MHZ)
WCDMA	Support 4G(B1/B3/B5), 3G(B1), 2G(900/1800MHZ)
CDMA2000	Support 4G(B1/B3/B5)
4G antenna	double antenna
Browser	IE6.0, IE7.0, IE8.0, Firefox, Google or another standard browser
AP Function	Support AP connect WIFI
P2P	Offer free P2P, Plug Play, Support QR code scanning to view
PC Browser	Support 12 language remote surveillance, record, alarm, Wi-Fi setting etc.
PC client	Support remote multi-devices monitor, record, alarm etc.
TF Card Record	Built in TF Card(MAX64GB)
Motion Detect	Support
Alarm Action	Support Email Photo Alert, Snapshot and Record saved to TF Card
Ethernet	RJ-45 (10/100Base-T)
Network Functions	HTTP, TCP/IP, IPv4/IPv6, ARP, IGMP, ICMP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, UPNP, NTP, Bonjour, SNMP, ONVIF ver 2.0
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information, Maintenance & Upgrade
Max. User Access	10 users
Smart Phone	iPhone, iPad, Android, Windows Phone
Environmental	
Working Angle	120-degree, photo angle 0-90degree
Dimension	193.5*105*100mm, 1.1Kg
Product Type	Metal Bullet, Outdoor waterproof IP67
Power	Built-in lithium battery(10400mA)+Solar Power Panel
Working Temperature	-10~60°C
Working Humidity	0%~90% RH

Note: Design & Specification are subject to change without prior notice.

VIDEOLINEUSA Security Systems, Inc.

Head Office : 601, Woolim e-BizII,
184-1 Guru Dong, Guru-gu,
Seoul 152-050, Korea
Tel # : +82-2-8913231
Fax # : +82-2-856-8732
Email : info@videolineusa.com